

235W-260W

Maximize solar return with
Solartech
High Performance Modules



ASC-6P-60-3BB Series

Multi-Crystalline Photovoltaic Modules

Maximize peak output with pre-sorted high quality 6" multi-crystalline cells

Ensure 5400pa snow loads and 2400pa wind loads with high transparent tempered glass and robust anodized aluminum frame

Commit protection in the severest weather conditions with certified EVA, Back sheet foil, and Junction box


10-year limited product warranty, 25-year limited power output warranty (90% for 10 years, 80% for 25 years)




ASC-6P-60-3BB Series 235W-260W

Multi-Crystalline Photovoltaic Modules

Mechanical Data

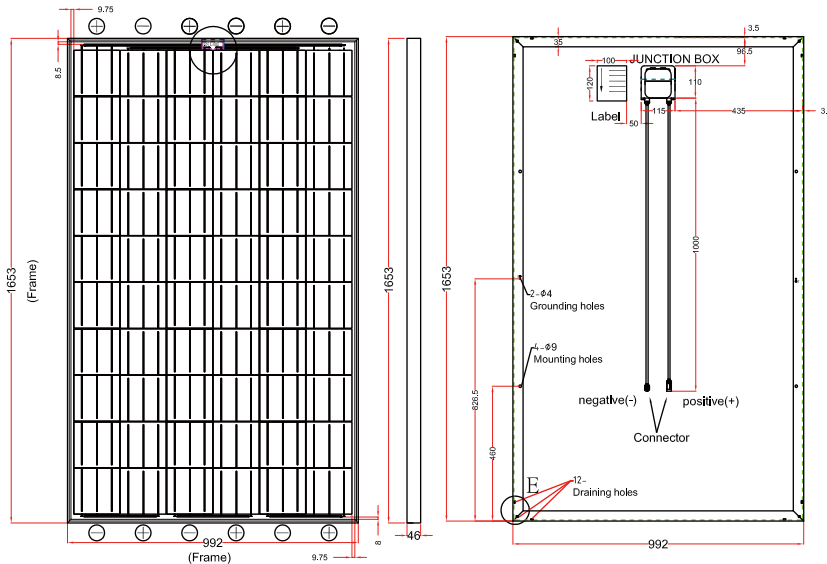


Dimension: 1653mm x 992mm x 46mm
 Cells: 60 polycrystalline 156x156mm cells
 Connection: Junction box IP65 with 3 bypass diodes
 Cable: 4mm²x1.0m with Tyco or MC4 compatible connectors
 Frame: Anodized aluminum
 Weight: 19.5kg / 42.95 lbs



IV Curve

IV and Pmax Curves with different radiation levels at 25°C

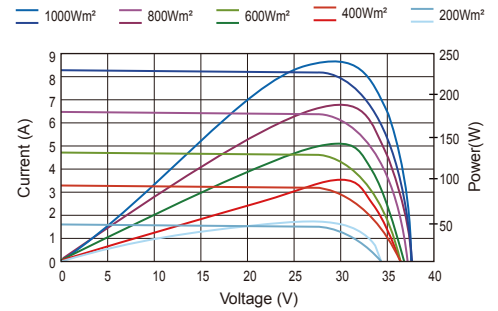

Temperature Coefficient

Temp. Coeff. of Isc = 0.05%/K
 Temp. Coeff. of Voc = -0.32%/K
 Temp. Coeff. of Pmax = -0.47%/K

Maximum Operation

Operational Temperature: -40°C to +85°C
 (-40°F to +185°F)
 Maximum System voltage(UL): 600V DC
 Maximum Reverse Current: 15A
 Maximum Load: Snow load 5400pa(IEC) or 550kg/m2
 Wind load 2400pa

Loading Capacity

20 ft container: 240 pcs (20pcs/pallet)
 40 ft container: 520 pcs (20pcs/pallet)
 40 ft HQ container: 624 pcs (24pcs/pallet)

Electrical Characteristics @ STC*

Module Number	ASC-6P-60-3BB-235	ASC-6P-60-3BB-240	ASC-6P-60-3BB-245	ASC-6P-60-3BB-250	ASC-6P-60-3BB-255	ASC-6P-60-3BB-260
Nominal Power Pmax[Wp]	235	240	245	250	255	260
Power Tolerance **	+/-3%	+/-3%	+/-3%	+/-3%	+/-3%	+/-3%
Nominal Voltage Vmax[V]	29.87	30.04	30.19	30.71	31.25	31.71
Nominal Current Imax[A]	7.87	7.99	8.12	8.14	8.16	8.20
Open Circuit Voc[V]	37.50	37.82	38.00	38.12	38.20	38.28
Short Circuit ISC[A]	8.35	8.48	8.61	8.64	8.66	8.70
Efficiency Eff [%]	14.33	14.64	14.94	15.25	15.55	15.86

*STC: Standard Test Conditions, measurement at radiation strength 1,000 W/m², spectral distribution AM 1.5, temperature 25°C, in accordance with IEC 60904-2
 NOCT: Nominal Operating Cell Temperature, 45.8 +/- 2°C, measurement at radiation strength 800 W/m², AM 1.5, Air temperature 20°C, wind speed 1m/s
 Specifications are subject to change without notice

Warranty

10 year limited product workmanship warranty
 25 year limited power output warranty: 90% minimum rated power for 10 years. 80% minimum rated power for 25 years